



Air Conditioning Technical Data RXF-F



TABLE OF CONTENTS

RXF-F

1	Features	4
	RXF-F	4
2	Specifications	5
3	Electrical data	9
4	Capacity tables	10
	Cooling/Heating Capacity Tables	10
5	Dimensional drawings	13
6	Centre of gravity	14
7	Piping diagrams	16
8	Wiring diagrams	18
	Wiring Diagrams - Three Phase	18
9	Sound data	20
	Sound Pressure Spectrum	20
10	Operation range	23

1 Features

1 - 1 RXF-F

- › Daikin outdoor units are neat, sturdy and can easily be mounted on a roof or terrace or simply placed against an outside wall
- › Daikin outdoor units are equipped with an anti-corrosion treated heat exchanger (blue fin) which ensures greater resistance to the most severe weather conditions
- › Outdoor units for pair application
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



Inverter
(25, 35 class)

2 Specifications

2 - 1 Specifications

Technical specifications			FTXF20F + RXF20F	FTXF25F + RXF25F	FTXF35F + RXF35F	FTXF42F + RXF42F	FTXF50F + RXF50F
Indoor unit			FTXF20F5V1B	FTXF25F5V1B	FTXF35F5V1B	FTXF42F5V1B	FTXF50F5V1B
Outdoor unit			RXF20F5V1B	RXF25F5V1B	RXF35F5V1B	RXF42F5V1B	RXF50F5V1B
Cooling capacity	Min.	kW	1.3			1.4	1.3
	Min.	Btu/h	4,400			4,800	4,500
	Min.	kcal/h	1,118			1,204	1,144.4
	Nom.	kW	2	2.5	3.3	4.2	5
	Nom.	Btu/h	6,800	8,500	11,300	14,300	17,100
	Nom.	kcal/h	1,720	2,150	2,838	3,611	4,302.1
	Max.	kW	2.4	2.8	3.8	4.3	5.3
	Max.	Btu/h	8,200	9,600	12,800	14,700	18,200
	Max.	kcal/h	2,064	2,408	3,224	3,697	4,586
Heating capacity	Min.	kW	1.3			1.4	1.43
	Min.	Btu/h	4,400			4,800	4,900
	Min.	kcal/h	1,118			1,204	1,230.4
	Nom.	kW	2.4	2.8	3.5	4.6	5.4
	Nom.	Btu/h	8,200	9,600	11,900	15,700	18,400
	Nom.	kcal/h	2,064	2,408	3,010	3,955	4,646.3
	Max.	kW	3.3	3.7	4.4	5	6.13
	Max.	Btu/h	11,300	12,600	15,000	17,100	20,900
	Max.	kcal/h	2,838	3,181	3,783	4,300	5,274.4
Power input	Cooling	Min.	0.31				0.27
		Nom.	0.592	0.772	1	1.27	1.52
		Max.	0.72	1.05	1.4	1.5	1.74
	Heating	Min.	0.25				0.26
		Nom.	0.64	0.75	0.94	1.24	1.46
		Max.	0.95	1.11	1.5	1.4	1.91
Nominal efficiency	EER	3.38		3.24	3.3		
	COP	3.75		3.73	3.71		
	Annual energy consumption	kWh	108	135	188	226	269
	Energy labeling Directive	Cooling	A				
		Heating	A				
Space cooling	Energy efficiency class	A++					
	Capacity Pdesign	kW	2	2.5	3.5	4.2	5
	SEER	6.5					
	Annual energy consumption	kWh/a	108	135	188	226	269
Space heating (Average climate)	Capacity Pdesign	kW	2.2	2.4	2.6	3.3	3.8
	Energy efficiency class	A+					
	SCOP/A	4.2		4.3		4.1	
	SCOPnet/A	4.25		4.36		4.15	
	Pdh Heating capacity at -10°	kW	1.86	1.97	2.21	2.61	3.24
	Annual energy consumption	kWh/a	733	801	867	1,075	1,297
	Required back up heating cap at design conditions	kW	0.34	0.43	0.39	0.69	0.56
	Capacity Pdesignh	kW	1.18	1.29	1.4	1.78	2.05
	Energy efficiency class	A+++					
	SCOP	5.2	5.22	5.26	5.25	5.17	
SCOPnet	5.5		5.59		5.47		
Annual energy consumption	kWh/a	318	346	373	475	555	
Required back up heating cap at design conditions	kW	0					
Space cooling	A Condition (35°C - 27/19)	Pdc	2	2.5	3.5	4.2	5
		EERd	3.38	3.24	3.1	3.3	
		Power input	kW	0.592	0.772	1.13	1.27
	B Condition (30°C - 27/19)	Pdc	1.47	1.84	2.58	3.09	3.68
		EERd	5.41	4.79	4.64	4.7	5.1
		Power input	kW	0.272	0.395	0.556	0.657
	C Condition (25°C - 27/19)	Pdc	1.14	1.18	1.66	1.99	2.37
		EERd	8.52	8.41	8.55	7.91	7.6
		Power input	kW	0.134	0.137	0.194	0.242
	D Condition (20°C - 27/19)	Pdc	1.3		1.32	1.35	1.8
		EERd	11.7		11.8	11.9	
		Power input	kW	0.111	0.112	0.113	0.151

2 Specifications

2 - 1 Specifications

2

Technical specifications					FTXF20F + RXF20F	FTXF25F + RXF25F	FTXF35F + RXF35F	FTXF42F + RXF42F	FTXF50F + RXF50F	
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C	-15					
	TBivalent	Tbiv (bivalent temperature)		°C	-7					
		PdH (declared heating cap)		kW	1.95	2.12	2.3		3.36	
		COPd (declared COP)			2.69		2.6	2.66	2.55	
	A Condition (-7°C)	Power input		kW	0.725	0.788	0.885	1.1	1.32	
		PdH (declared heating cap)		kW	1.95	2.12	2.3	2.92	3.36	
		COPd (declared COP)			2.69		2.6	2.66	2.55	
	B Condition (2°C)	Power input		kW	0.725	0.771	0.875	1.08	1.32	
		PdH (declared heating cap)		kW	1.18	1.29	1.4	1.78	2.05	
		COPd (declared COP)			4.2	4.18		4.44	4.05	
	C Condition (7°C)	Power input		kW	0.281	0.309	0.335	0.401	0.506	
		PdH (declared heating cap)		kW	0.92		0.93	1.14	1.49	
		COPd (declared COP)			5.66	5.62	5.65	5.42	5.72	
	C Condition (7°C)	Power input		kW	0.163	0.164	0.165	0.21	0.26	
		PdH (declared heating cap)		kW	1.06		1.1		1.75	
		COPd (declared COP)			6.98	6.85	6.86	6.88	6.75	
	E condition (-10°C)	Power input		kW	0.152	0.155	0.16		0.259	
		PdH (declared heating cap)		kW	1.71		2.05	2.1	3.24	
COPd (declared COP)			2.55		2	2.06	2.58			
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C	-15					
	TBivalent	Tbiv (bivalent temperature)		°C	2					
		PdH (declared heating cap)		kW	1.18	1.29	1.4	1.78	2.05	
		COPd (declared COP)			4.2	4.18		4.44	4.05	
	B Condition (2°C)	Power input		kW	0.281	0.309	0.335	0.401	0.506	
		PdH (declared heating cap)		kW	1.18	1.29	1.4	1.78	2.05	
		COPd (declared COP)			4.2	4.18		4.44	4.05	
	C Condition (7°C)	Power input		kW	0.281	0.309	0.335	0.401	0.506	
		PdH (declared heating cap)		kW	0.92		0.93	1.14	1.49	
		COPd (declared COP)			5.66	5.62	5.65	5.42	5.72	
	D Condition (12°C)	Power input		kW	0.163	0.164	0.165	0.21	0.26	
		PdH (declared heating cap)		kW	1.06		1.1		1.75	
		COPd (declared COP)			6.98	6.85	6.86	6.88	6.75	
	E condition (2°C)	Power input		kW	0.152	0.155	0.16		0.259	
		PdH (declared heating cap)		kW	1.71		2.05	2.1	2.05	
		COPd (declared COP)			2.55		2	2.06	4.05	
	Power consumption in other than active mode	Crankcase heater mode		PCK	W	0				
		Off mode		POFF	W	1				
Standby mode		Cooling	PSB	W	1					
		Heating	PSB	W	1					
Thermo-stat-off mode		PTO	Cooling	W	23	24	29	40		
			Heating	W	23		29	40		
Cooling	Cdc (Degradation cooling)			0.25						
Heating	Cdh (Degradation heating)			0.25						
Cooling function included					Yes					
Heating function included					Yes					
Average climate included					Yes					
Cold season included					No					
Warm season included					Yes					
Ecolabel logo					No	Yes			No	
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)	60		61			
		Cooling	Nom.	dB(A)	53	54		59		
	Piping length	Cooling	Measuring condition	m	5					

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. Data for high efficiency series, Eurovent certified |

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. Data for standard efficiency series | See separate drawing for electrical data

Technical Specifications					RXF20F	RXF25F	RXF35F	RXF42F	RXF50F
Casing	Colour				Ivory white				

2 Specifications

2 - 1 Specifications

Technical Specifications					RXF20F	RXF25F	RXF35F	RXF42F	RXF50F
Dimensions	Unit	Height	mm		556				610
		Width	mm		740				923
		Depth	mm		343				367
	Packed unit	Height	mm		630				675
		Width	mm		790				1,007
		Depth	mm		400				450
Weight	Unit		kg		24		28	40	
	Packed unit		kg		26		30	43	
Packing	Weight		kg		2			3	
Heat exchanger	Length		mm		670		647	869	
	Rows	Quantity			1		2		
	Fin pitch		mm		1.4				
	Stages	Quantity			24			26	
	Tube type				ø7 Hi-XD				
	Tube material				Copper				
	Fin	Type			Waffle Hydrophilic Blue Fin				
Fan	Type				Propeller				
	Air flow rate	Cooling	High	m ³ /min	27.6	29	28.5	40.1	
			Low	cfm	975	1,024	1,006	1,416	
	Heating	High	High	m ³ /min	27.1	28	27.5	40.1	
Low			cfm	957	990	971	1,416		
Fan motor	Model				DFC03Z1VA			DFC05A3VA	
	Insulation grade				Class "E"				
	Output		W		28			50	
	Speed	Cooling	High	rpm	760	820		870	
			Low	rpm		640		600	
	Heating	High	High	rpm	790	820		870	
Low			rpm		550		600		
Compressor	Model				1Y078BKAX1P#D		1Y091BKCX1P#G	2Y1478KBX1P#D	
	Oil Amount		cm ³		400		375	650	
	Type				Hermetically sealed swing compressor				
	Output		W		700			1,300	
	Oil Type				FW68DA				
Operation range	Cooling	Ambient	Min.	°CDB				-10	
			Max.	°CDB				48	
Operation range	Heating	Ambient	Min.	°CWB				-15	
			Max.	°CWB				18	
Sound power level	Cooling	Nom.		dBA	60	61			
	Heating	Nom.		dBA	60	62		61	
Sound pressure level	Cooling	High		dBA	46	48			
	Heating	High		dBA	47	48		49	
Refrigerant	Type				R-32				
	Charge		kg		0.42	0.55	0.75	0.8	
	Charge		tCO ₂ Eq		0.28	0.37	0.51	0.54	
	GWP				675				
Piping connections	Liquid	OD	mm		6				
	Gas	OD	mm		9.5			12.7	
	Drain	OD	mm		18			16	
	Piping length	OU - IU	Min.	m	2				
			Max.	m	20			30	
	Additional refrigerant charge		kg/m		0.02 (for piping length exceeding 10m)				
	Level difference	IU - OU	Max.	m	12			20	
	Heat insulation				Both liquid and gas pipes				
Capacity control	Method			Variable (inverter)					

Standard accessories: Installation manual;Quantity: 1;

Standard accessories: Refrigerant charge label;Quantity: 1;

Standard accessories: Multilingual fluorinated greenhouse gases labels;Quantity: 1;

Standard accessories: General safety precautions;Quantity: 1;

Standard accessories: Drain plug;Quantity: 1;

2 Specifications

2 - 1 Specifications

2

Electrical Specifications			RXF20F	RXF25F	RXF35F	RXF42F	RXF50F
Power supply	Phase				1~		
	Frequency	Hz			50		
	Voltage	V			220-240		
Wiring connections	For power supply	Quantity			3		
		Remark			Earth wire included		
	For connection with indoor	Quantity			4		
		Remark			Earth wire included		
Current - 60Hz	Maximum fuse amps (MFA)	A			16		

Contains fluorinated greenhouse gases |
 See separate drawing for electrical data |
 See separate drawing for operation range

3 Electrical data

3 - 1 Electrical Data

RXF-F ARXF-F

Unit combination restrictions		Power supply					COMP		OFM		IFM	
Indoor unit	Outdoor unit	Hz	Voltage	Voltage range	MCA	MFA	RHz	RLA	kW	FLA	kW	FLA
FTXF20F5V1B	RXF20F5V1B	50	220	Maximum ·50-Hz ·264-V Minimum ·50-Hz ·198-V	8,06	16	39,0	2,7	0,024	0,17	0,029	0,41
		50	230					2,6				
		50	240					2,5				
FTXF25F5V1B	RXF25F5V1B	50	220	Maximum ·50-Hz ·264-V Minimum ·50-Hz ·198-V	8,14	16	54,0	3,0	0,033	0,24	0,029	0,41
		50	230					2,8				
		50	240					2,7				
FTXF35F5V1B	RXF35F5V1B	50	220	Maximum ·50-Hz ·264-V Minimum ·50-Hz ·198-V	9,36	16	68,0	4,4	0,033	0,24	0,037	0,52
		50	230					4,2				
		50	240					4,0				
FTXF42F5V1B	RXF42F5V1B	50	220	Maximum ·50-Hz ·264-V Minimum ·50-Hz ·198-V	9,44	16	78,0	5,7	0,030	0,23	0,050	0,60
		50	230					5,4				
		50	240					5,2				
FTXF50F5V1B	RXF50F5V1B	50	220	Maximum ·50-Hz ·264-V Minimum ·50-Hz ·198-V	10,43	16	64,0	5,7	0,052	0,63	0,050	0,60
		50	230					5,5				
		50	240					5,3				
ATXF20F5V1B	ARXF20F5V1B	50	220	Maximum ·50-Hz ·264-V Minimum ·50-Hz ·198-V	8,06	16	39,0	2,7	0,024	0,17	0,029	0,41
		50	230					2,6				
		50	240					2,5				
ATXF25F5V1B	ARXF25F5V1B	50	220	Maximum ·50-Hz ·264-V Minimum ·50-Hz ·198-V	8,14	16	54,0	3,0	0,033	0,24	0,029	0,41
		50	230					2,8				
		50	240					2,7				
ATXF35F5V1B	ATXF35F5V1B	50	220	Maximum ·50-Hz ·264-V Minimum ·50-Hz ·198-V	9,36	16	68,0	4,4	0,033	0,24	0,037	0,52
		50	230					4,2				
		50	240					4,0				
ATXF42F5V1B	ATXF42F5V1B	50	220	Maximum ·50-Hz ·264-V Minimum ·50-Hz ·198-V	9,44	16	78,0	5,7	0,030	0,23	0,050	0,60
		50	230					5,4				
		50	240					5,2				
ATXF50F5V1B	RXF50F5V1B	50	220	Maximum ·50-Hz ·264-V Minimum ·50-Hz ·198-V	10,43	16	64,0	5,7	0,052	0,63	0,050	0,60
		50	230					5,5				
		50	240					5,3				

4D153055

4 Capacity tables

4 - 1 Cooling/Heating Capacity Tables

FTXF20F / RXF20F

Cooling -50Hz 220-240V-

AFR	9,8
BF	0,22

Indoor temperature		Outdoor temperature [°C DB]																	
EWB	EDB	20			25			30			32			35			40		
		TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14	20	2,05	1,80	0,48	1,96	1,76	0,52	1,86	1,72	0,56	1,83	1,70	0,57	1,77	1,67	0,59	1,68	1,63	0,63
16	22	2,14	1,77	0,48	2,05	1,73	0,52	1,95	1,69	0,55	1,92	1,68	0,57	1,86	1,65	0,59	1,77	1,61	0,63
18	25	2,23	1,89	0,48	2,14	1,86	0,52	2,05	1,82	0,56	2,01	1,81	0,57	1,95	1,78	0,59	1,86	1,75	0,63
19	27	2,28	2,03	0,48	2,19	2,00	0,52	2,09	1,96	0,56	2,06	1,95	0,57	2,00	1,93	0,59	1,91	1,89	0,63
22	30	2,42	1,97	0,49	2,32	1,94	0,53	2,23	1,91	0,57	2,19	1,90	0,58	2,14	1,88	0,60	2,05	1,85	0,64
24	32	2,51	1,93	0,49	2,42	1,91	0,53	2,32	1,88	0,57	2,29	1,87	0,58	2,23	1,85	0,60	2,14	1,82	0,64

Heating -50Hz 220-240V-

AFR	10,4
-----	------

Indoor temperature		Outdoor temperature [°C WB]											
EDB	°C	-15		-10		-5		0		6		10	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15	1,09	0,41	1,33	0,42	1,57	0,44	1,82	0,60	2,46	0,63	2,71	0,65	
20	1,02	0,42	1,26	0,43	1,50	0,47	1,74	0,61	2,40	0,64	2,63	0,66	
22	0,99	0,42	1,23	0,44	1,47	0,47	1,71	0,61	2,37	0,65	2,59	0,67	
24	0,96	0,42	1,20	0,44	1,44	0,48	1,68	0,63	2,33	0,65	2,56	0,67	
25	0,94	0,43	1,18	0,44	1,42	0,48	1,66	0,63	2,31	0,66	2,54	0,67	
27	0,91	0,43	1,15	0,47	1,39	0,48	1,64	0,63	2,28	0,66	2,51	0,68	

Heating capacity at nominal operating frequency, measured according to EN 14511.

Indoor temperature		Outdoor temperature [°C WB]													
EDB	°C	-15		-10		-5		0		6		10		20	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI		
20	1,48	0,87	1,98	0,89	2,01	0,91	2,46	0,93	3,30	0,95	3,59	0,96	4,31	1,00	

Heating capacity at maximum operating frequency, measured according to EN 14511

Notes

- The bold cells indicate the standard conditions.
- The capacities are based on the following conditions:
Corresponding refrigerant piping length: -5 m
Level difference: 0 m
- The air flow rate and bypass factor are mentioned in the table.
- The ratings shown are net capacities which include a deduction for indoor fan motor heat.
- The total capacity, power input and sensible heat capacity must be calculated by interpolation, using the figures in the table (figures not in the table may not be used in the calculation).

Symbols

- AFR: Air flow rate [m³/min]
- BF: Bypass factor
- EWB: Entering wet-bulb temperature [°C WB]
- EDB: Entering dry-bulb temperature [°C DB]
- TC: Total capacity [kW]
- SHC: Sensible heat capacity [kW]
- PI: Power input [kW]

4D153056

FTXF25F / RXF25F

Cooling -50Hz 220-240V-

AFR	10,0
BF	0,22

Indoor temperature		Outdoor temperature [°C DB]																	
EWB	EDB	20			25			30			32			35			40		
		TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14	20	2,56	2,08	0,61	2,44	2,03	0,66	2,33	1,97	0,72	2,28	1,95	0,74	2,21	1,92	0,77	2,10	1,86	0,82
16	22	2,68	2,05	0,60	2,56	1,99	0,66	2,44	1,94	0,71	2,40	1,92	0,74	2,33	1,89	0,77	2,21	1,84	0,83
18	25	2,79	2,17	0,60	2,68	2,12	0,66	2,56	2,07	0,71	2,51	2,06	0,74	2,44	2,03	0,77	2,33	1,98	0,83
19	27	2,85	2,31	0,60	2,73	2,27	0,66	2,62	2,22	0,71	2,57	2,20	0,74	2,50	2,18	0,77	2,38	2,13	0,83
22	30	3,02	2,24	0,62	2,91	2,20	0,67	2,79	2,16	0,73	2,74	2,14	0,75	2,67	2,12	0,78	2,56	2,08	0,83
24	32	3,14	2,19	0,61	3,02	2,15	0,66	2,90	2,12	0,72	2,86	2,10	0,75	2,79	2,08	0,78	2,67	2,04	0,84

Heating -50Hz 220-240V-

AFR	10,4
-----	------

Indoor temperature		Outdoor temperature [°C WB]											
EDB	°C	-15		-10		-5		0		6		10	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15	1,33	0,48	1,61	0,51	1,87	0,53	2,15	0,70	2,89	0,73	3,15	0,76	
20	1,25	0,50	1,52	0,52	1,79	0,54	2,06	0,71	2,80	0,75	3,05	0,77	
22	1,22	0,50	1,48	0,52	1,75	0,55	2,03	0,72	2,76	0,75	3,01	0,78	
24	1,19	0,51	1,46	0,53	1,73	0,55	2,00	0,73	2,73	0,76	2,98	0,78	
25	1,17	0,51	1,44	0,53	1,71	0,55	1,98	0,73	2,71	0,76	2,96	0,79	
27	1,14	0,51	1,41	0,54	1,67	0,57	1,95	0,74	2,67	0,77	2,92	0,79	

Heating capacity at nominal operating frequency, measured according to EN 14511.

Indoor temperature		Outdoor temperature [°C WB]													
EDB	°C	-15		-10		-5		0		6		10		20	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI		
20	2,04	1,13	2,44	1,16	2,44	1,19	2,77	1,22	3,70	1,26	4,02	1,28	4,58	1,24	

Heating capacity at maximum operating frequency, measured according to EN 14511

Notes

- The bold cells indicate the standard conditions.
- The capacities are based on the following conditions:
Corresponding refrigerant piping length: -5 m
Level difference: 0 m
- The air flow rate and bypass factor are mentioned in the table.
- The ratings shown are net capacities which include a deduction for indoor fan motor heat.
- The total capacity, power input and sensible heat capacity must be calculated by interpolation, using the figures in the table (figures not in the table may not be used in the calculation).

Symbols

- AFR: Air flow rate [m³/min]
- BF: Bypass factor
- EWB: Entering wet-bulb temperature [°C WB]
- EDB: Entering dry-bulb temperature [°C DB]
- TC: Total capacity [kW]
- SHC: Sensible heat capacity [kW]
- PI: Power input [kW]

4D153057

4 Capacity tables

4 - 1 Cooling/Heating Capacity Tables

FTXF35F / RXF35F

Cooling -50Hz 220-240V-

AFR	11,5
BF	0,23

Indoor temperature		Outdoor temperature [°C DB]																							
EWB	EDB	20				25				30				32				35				40			
		TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI			
14	20	3,38	2,54	0,76	3,22	2,46	0,84	3,07	2,39	0,91	3,01	2,36	0,94	2,92	2,31	0,99	2,76	2,23	1,06						
16	22	3,54	2,50	0,77	3,38	2,42	0,84	3,22	2,35	0,92	3,17	2,33	0,95	3,07	2,28	0,99	2,92	2,22	1,07						
18	25	3,69	2,62	0,77	3,54	2,56	0,85	3,38	2,49	0,92	3,32	2,46	0,95	3,22	2,42	1,00	3,07	2,36	1,07						
19	27	3,76	2,76	0,77	3,61	2,70	0,85	3,45	2,64	0,92	3,39	2,61	0,95	3,30	2,57	1,00	3,15	2,52	1,08						
22	30	3,99	2,67	0,78	3,84	2,61	0,86	3,68	2,56	0,93	3,62	2,54	0,96	3,53	2,50	1,01	3,38	2,44	1,08						
24	32	4,14	2,60	0,79	3,99	2,55	0,86	3,84	2,50	0,94	3,77	2,48	0,97	3,68	2,44	1,01	3,53	2,39	1,09						

Heating -50Hz 220-240V-

AFR	11,9
-----	------

Indoor temperature		Outdoor temperature [°C WB]											
EDB	°C	-15		-10		-5		0		6		10	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15	1,66	0,60	2,00	0,63	2,34	0,67	2,69	0,87	3,62	0,92	3,94	0,95	
20	1,57	0,62	1,90	0,65	2,24	0,68	2,58	0,90	3,50	0,94	3,82	0,97	
22	1,52	0,63	1,86	0,66	2,20	0,69	2,54	0,90	3,45	0,94	3,77	0,98	
24	1,48	0,63	1,82	0,67	2,15	0,70	2,49	0,91	3,40	0,95	3,72	0,99	
25	1,46	0,64	1,79	0,67	2,14	0,70	2,48	0,92	3,38	0,96	3,69	0,99	
27	1,42	0,64	1,76	0,68	2,09	0,71	2,43	0,92	3,33	0,97	3,65	1,00	

Heating capacity at nominal operating frequency, measured according to EN 14511.

Indoor temperature		Outdoor temperature [°C WB]													
EDB	°C	-15		-10		-5		0		6		10		20	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI		
20	2,43	1,35	2,66	1,39	2,90	1,42	3,30	1,46	4,40	1,50	4,78	1,53	5,44	1,48	

Heating capacity at maximum operating frequency, measured according to EN 14511

Notes

- The bold cells indicate the standard conditions.
- The capacities are based on the following conditions:
Corresponding refrigerant piping length: 5 m
Level difference: 0 m
- The air flow rate and bypass factor are mentioned in the table.
- The ratings shown are net capacities which include a deduction for indoor fan motor heat.
- The total capacity, power input and sensible heat capacity must be calculated by interpolation, using the figures in the table (figures not in the table may not be used in the calculation).

Symbols

- AFR: Air flow rate [m³/min]
BF: Bypass factor
EWB: Entering wet-bulb temperature [°C WB]
EDB: Entering dry-bulb temperature [°C DB]
TC: Total capacity [kW]
SHC: Sensible heat capacity [kW]
PI: Power input [kW]

4D153058

FTXF42F / RXF42F

Cooling -50Hz 220-240V-

AFR	12,6
BF	0,23

Indoor temperature		Outdoor temperature [°C DB]																							
EWB	EDB	20				25				30				32				35				40			
		TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI			
14	20	4,17	3,14	1,04	4,02	3,07	1,11	3,86	3,01	1,19	3,80	2,98	1,22	3,71	2,93	1,26	3,56	2,87	1,34						
16	22	4,38	3,09	1,04	4,22	3,02	1,11	4,07	2,97	1,19	4,00	2,94	1,22	3,91	2,90	1,26	3,76	2,85	1,34						
18	25	4,57	3,24	1,05	4,41	3,19	1,12	4,26	3,14	1,20	4,19	3,11	1,23	4,10	3,08	1,27	3,94	3,03	1,35						
19	27	4,66	3,42	1,05	4,51	3,37	1,12	4,35	3,33	1,20	4,29	3,30	1,23	4,20	3,27	1,27	4,05	3,24	1,35						
22	30	4,95	3,31	1,06	4,80	3,26	1,13	4,64	3,23	1,21	4,58	3,21	1,24	4,49	3,18	1,28	4,34	3,13	1,36						
24	32	5,14	3,23	1,06	4,99	3,19	1,13	4,83	3,15	1,21	4,77	3,14	1,24	4,68	3,10	1,28	4,53	3,07	1,36						

Heating -50Hz 220-240V-

AFR	12,8
-----	------

Indoor temperature		Outdoor temperature [°C WB]											
EDB	°C	-15		-10		-5		0		6		10	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15	2,18	0,79	2,63	0,83	3,08	0,88	3,54	1,15	4,76	1,21	5,18	1,25	
20	2,06	0,82	2,50	0,86	2,94	0,90	3,39	1,19	4,60	1,24	5,02	1,28	
22	2,00	0,83	2,44	0,87	2,89	0,91	3,34	1,19	4,53	1,24	4,95	1,29	
24	1,95	0,83	2,39	0,88	2,83	0,92	3,27	1,20	4,47	1,25	4,89	1,31	
25	1,92	0,84	2,35	0,88	2,81	0,92	3,26	1,21	4,44	1,27	4,85	1,31	
27	1,87	0,84	2,31	0,90	2,75	0,94	3,19	1,21	4,38	1,28	4,80	1,32	

Heating capacity at nominal operating frequency, measured according to EN 14511.

Indoor temperature		Outdoor temperature [°C WB]													
EDB	°C	-15		-10		-5		0		6		10		20	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI		
20	2,60	1,07	2,92	1,18	3,12	1,25	3,52	1,32	5,00	1,40	5,26	1,47	5,26	1,41	

Heating capacity at maximum operating frequency, measured according to EN 14511

Notes

- The bold cells indicate the standard conditions.
- The capacities are based on the following conditions:
Corresponding refrigerant piping length: 5 m
Level difference: 0 m
- The air flow rate and bypass factor are mentioned in the table.
- The ratings shown are net capacities which include a deduction for indoor fan motor heat.
- The total capacity, power input and sensible heat capacity must be calculated by interpolation, using the figures in the table (figures not in the table may not be used in the calculation).

Symbols

- AFR: Air flow rate [m³/min]
BF: Bypass factor
EWB: Entering wet-bulb temperature [°C WB]
EDB: Entering dry-bulb temperature [°C DB]
TC: Total capacity [kW]
SHC: Sensible heat capacity [kW]
PI: Power input [kW]

4D153059

4 Capacity tables

4 - 1 Cooling/Heating Capacity Tables

FTXF50F / RXF50F

Cooling -50Hz 220-240V-

AFR	12,6
BF	0,23

Indoor temperature		Outdoor temperature [°C DB]																	
EWB	EDB	20			25			30			32			35			40		
		TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14	20	4,97	3,53	1,29	4,82	3,47	1,37	4,66	3,40	1,44	4,60	3,38	1,47	4,51	3,33	1,52	4,36	3,27	1,59
16	22	5,18	3,49	1,29	5,02	3,42	1,37	4,87	3,36	1,44	4,80	3,34	1,47	4,71	3,30	1,52	4,56	3,25	1,59
18	25	5,37	3,64	1,30	5,21	3,59	1,38	5,06	3,53	1,45	4,99	3,50	1,48	4,90	3,48	1,53	4,74	3,43	1,60
19	27	5,46	3,82	1,30	5,31	3,77	1,38	5,15	3,73	1,45	5,09	3,70	1,48	5,00	3,67	1,53	4,85	3,63	1,60
22	30	5,75	3,71	1,31	5,60	3,66	1,39	5,44	3,63	1,46	5,38	3,61	1,49	5,29	3,58	1,54	5,14	3,53	1,61
24	32	5,94	3,62	1,31	5,79	3,58	1,39	5,63	3,54	1,46	5,57	3,53	1,49	5,48	3,50	1,54	5,33	3,46	1,61

Heating -50Hz 220-240V-

AFR	12,8
-----	------

Indoor temperature		Outdoor temperature [°C WB]											
EDB	°C	-15		-10		-5		0		6		10	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15	2,77	1,05	3,43	1,13	3,69	1,21	4,10	1,29	5,56	1,38	6,09	1,45	
20	2,61	1,12	3,27	1,20	3,55	1,28	3,96	1,36	5,40	1,46	5,93	1,52	
22	2,55	1,15	3,21	1,23	3,49	1,31	3,90	1,39	5,34	1,49	5,87	1,55	
24	2,48	1,18	3,15	1,26	3,43	1,34	3,85	1,42	5,27	1,52	5,80	1,58	
25	2,45	1,20	3,11	1,28	3,40	1,36	3,82	1,44	5,24	1,53	5,77	1,60	
27	2,39	1,23	3,05	1,31	3,34	1,39	3,77	1,47	5,18	1,56	5,71	1,63	

Heating capacity at nominal operating frequency, measured according to EN 14511.

Indoor temperature		Outdoor temperature [°C WB]												
EDB	°C	-15		-10		-5		0		6		10		
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	
20	3,15	1,36	3,53	1,50	3,78	1,59	4,26	1,67	6,05	1,78	6,37	1,86	6,37	1,79

Heating capacity at maximum operating frequency, measured according to EN 14511

Notes

- The bold cells indicate the standard conditions.
- The capacities are based on the following conditions:
Corresponding refrigerant piping length: 5 m
Level difference: 0 m
- The air flow rate and bypass factor are mentioned in the table.
- The ratings shown are net capacities which include a deduction for indoor fan motor heat.
- The total capacity, power input and sensible heat capacity must be calculated by interpolation, using the figures in the table (figures not in the table may not be used in the calculation).

Symbols


- AFR: Air flow rate [m³/min]
- BF: Bypass factor
- EWB: Entering wet-bulb temperature (°C WB)
- EDB: Entering dry-bulb temperature (°C DB)
- TC: Total capacity [kW]
- SHC: Sensible heat capacity [kW]
- PI: Power input [kW]

4D153060

5 Dimensional drawings

5 - 1 Dimensional Drawings

RXF20-42F
ARXF20-42F

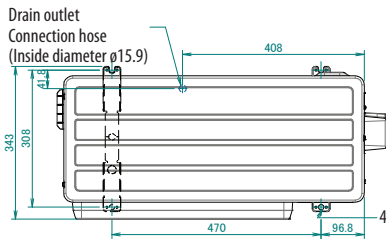


NOTATION


1- brand name label details can be seen below.

Daikin brand label: 3P698070-1


Siesta brand label: 3P698070-3

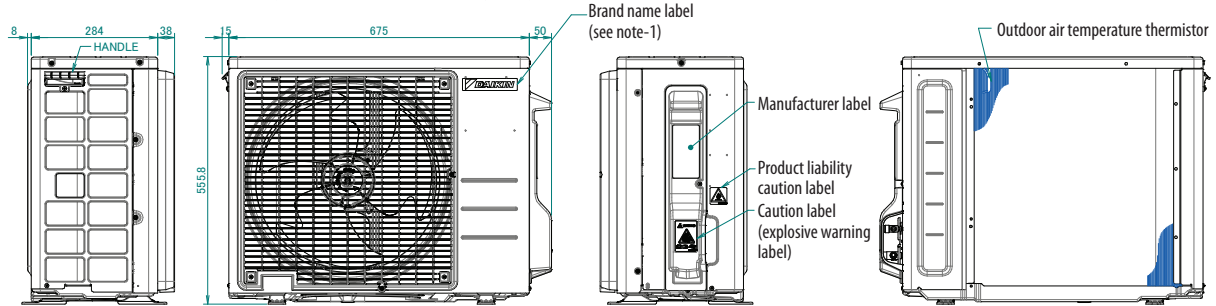

Minimum space for air passage
Wall height on air outlet side < 1200 mm


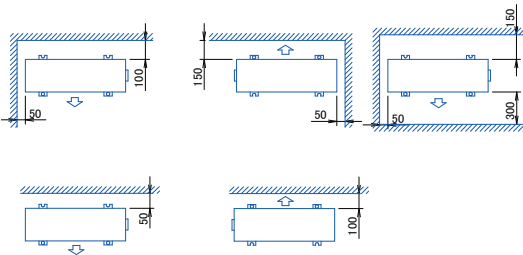


In case of removing the stop valve cover.

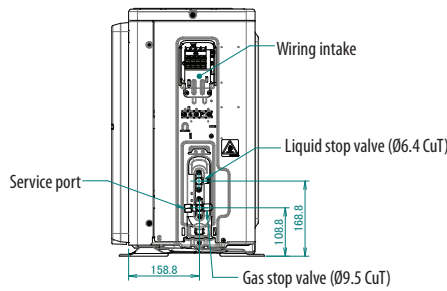


2D143507


RXF50F
ARXF50F

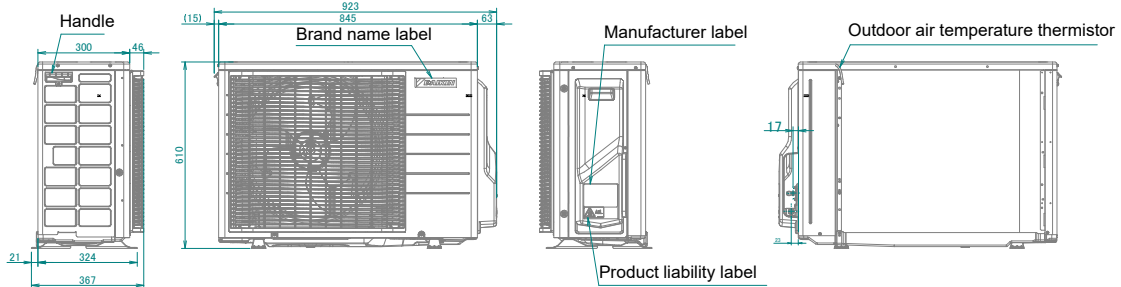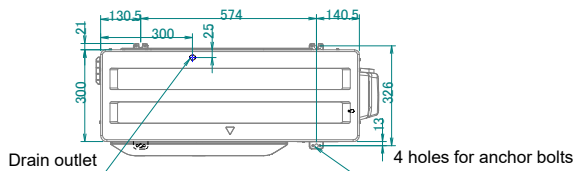

Minimum space for air passage
Wall height on air outlet side < 1200 mm

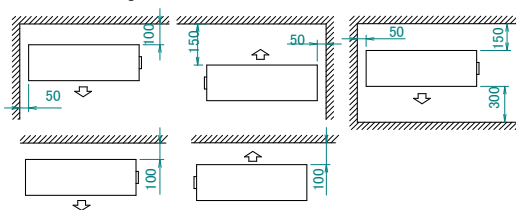

In case of removing the stop valve cover.

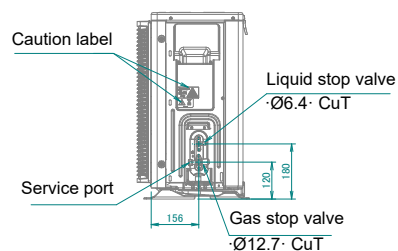


3D153218

6 Centre of gravity

6 - 1 Centre of Gravity


6

RXF20-35F
ARXF20-35F

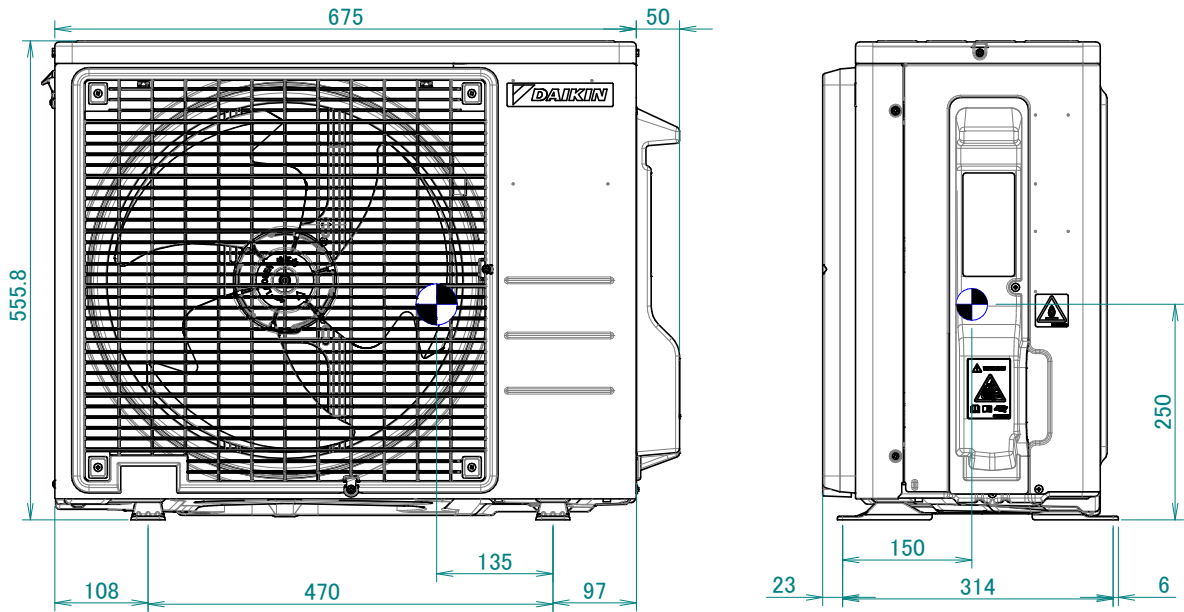

4D144283

RXF42F
ARXF42F

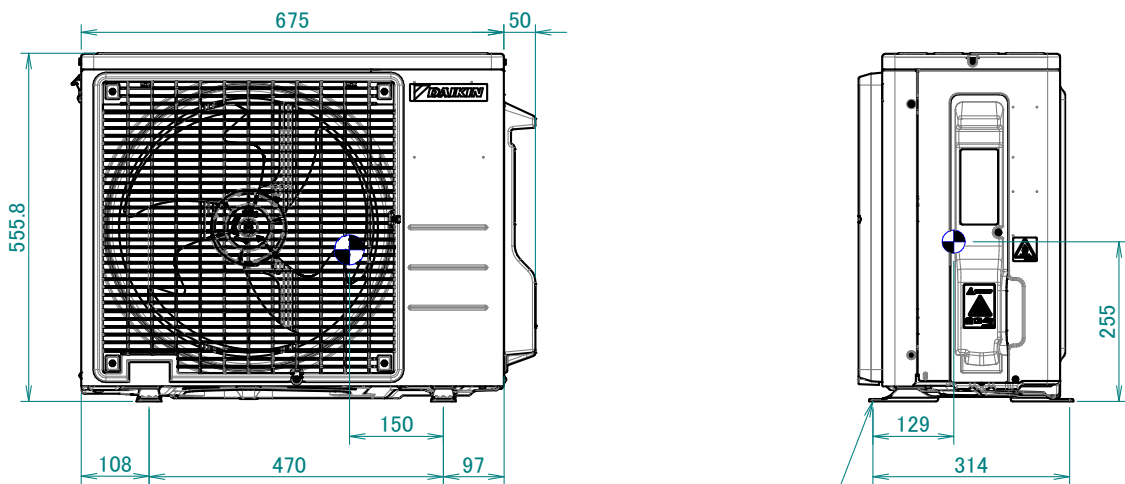


Foundation bolt hole

4D144285

6 Centre of gravity

6 - 1 Centre of Gravity

RXF50F
ARXF50F

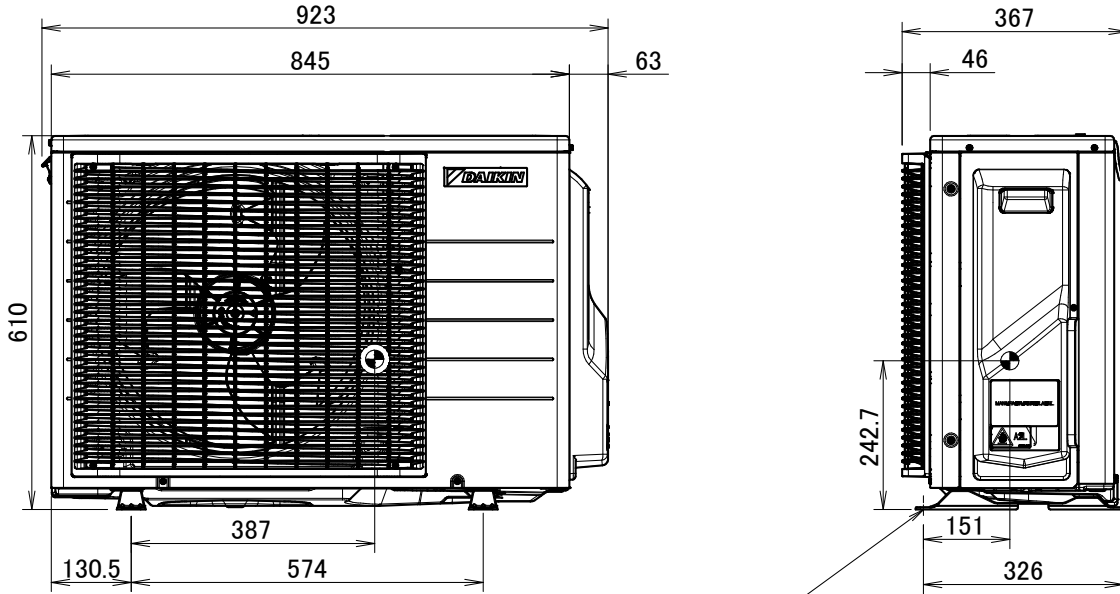

Foundation bolt hole

4D148193


7 Piping diagrams

7 - 1 Piping Diagrams

7


RXF20-35F
ARXF20-35F

Outdoor unit

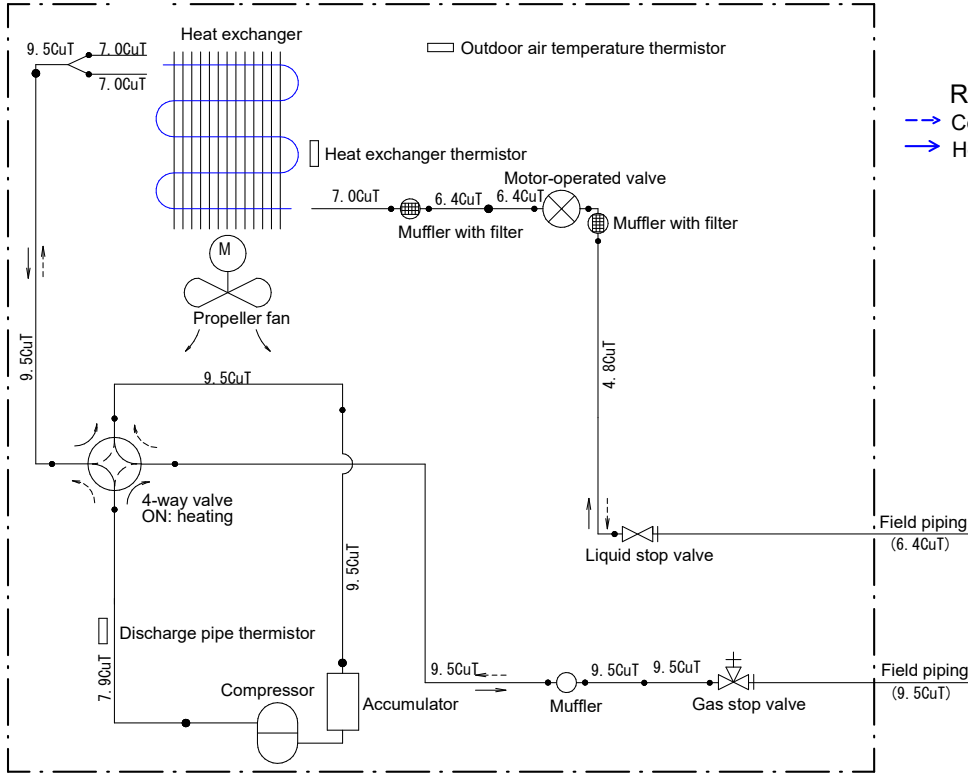


RXF42F
ARXF42F

Outdoor unit

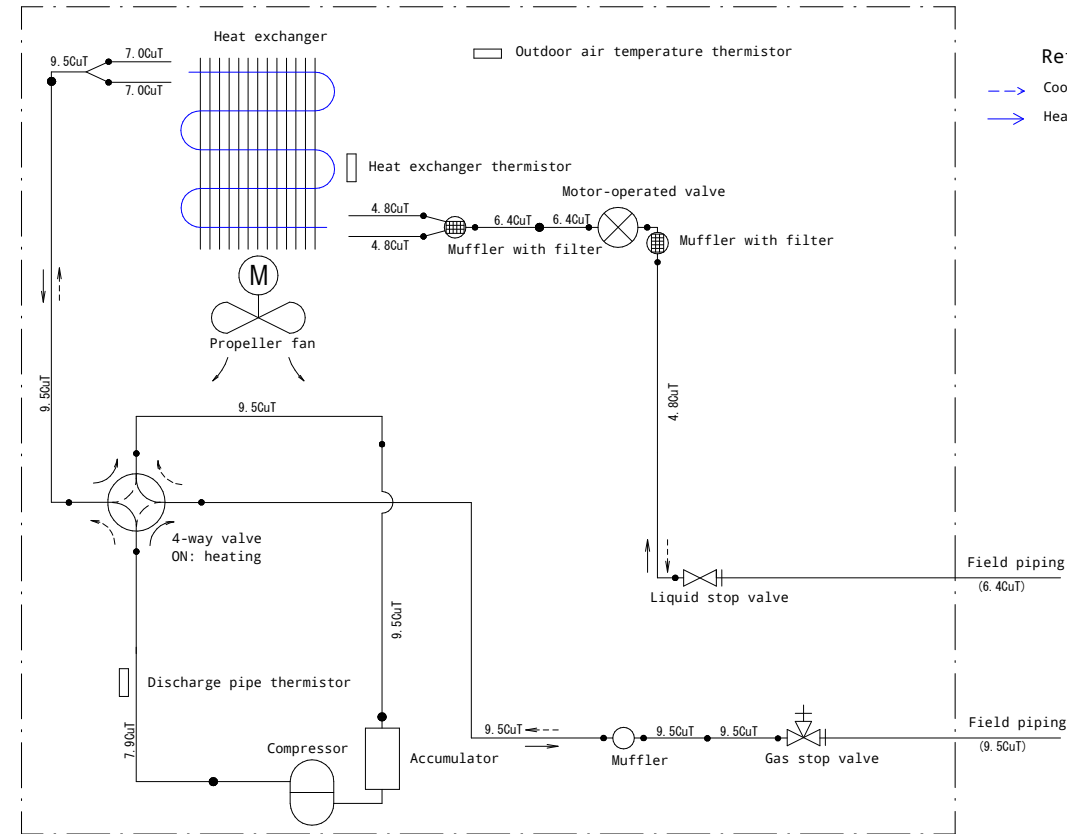

7 Piping diagrams

7 - 1 Piping Diagrams

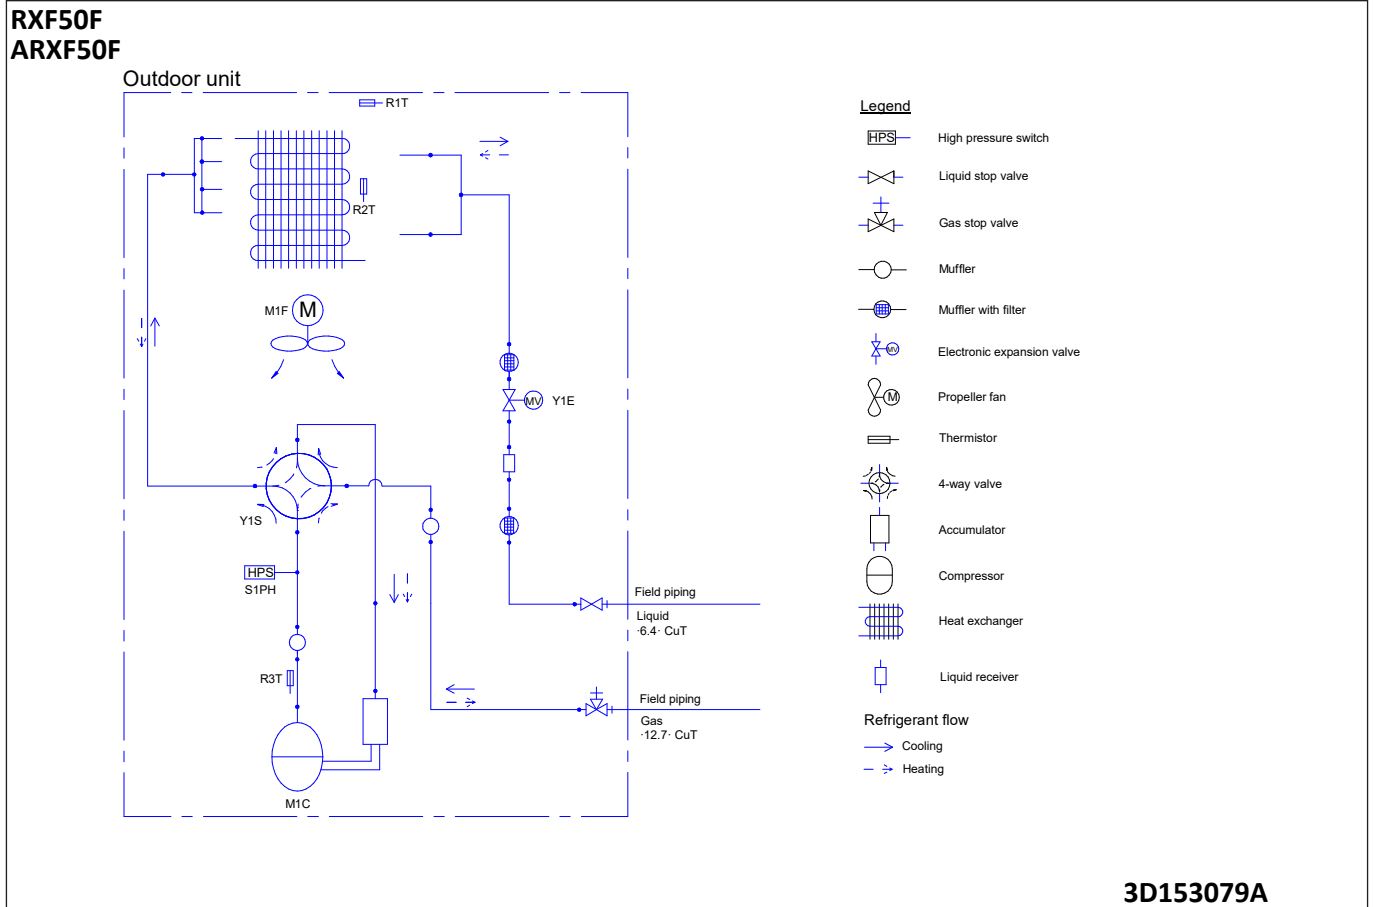

8 Wiring diagrams

8 - 1 Wiring Diagrams - Three Phase

8

RXF20-42F
ARXF20-42F

Wiring diagram

Field wiring :

NOTE
Refer to the nameplate for the power requirements.

Wire colors

BLK	: Black
WHT	: White
BRN	: Brown
RED	: Red
GRN	: Green
YLW	: Yellow
ORG	: Orange
BLU	: Blue

C1, C2, C400, C405	Capacitor	SA1	Surge arrester
D401, D402	Diode	S, S10, S20, S30, S40, S71, S80, S90, E1, HR1, HR2, X1A	Connector
DB1	Diode bridge	V2, V3	Varistor
FU2, FU3	Fuse	X1M	Terminal strip
IPM1, IPM2	Intelligent power module	Y1S	Reversing solenoid valve coil
L1R	Reactor	PTC1	Thermistor PTC
M1C	Compressor motor	Y1E	Electronic expansion valve coil
M1F	Fan motor	Z1C, Z2C, Z3C	Ferrite core
K30R, K10R, MR4	Magnetic relay	ZF	Noise filter
A1P	Printed circuit board	⊕	Protective earth
PS	Switching power supply	⊥	Earth
Q1L	Overload protector		
R1T, R2T, R3T	Thermistor		

NOTES

- Size : length 140 x height 80
- Refer to purchasing specification AS303002, unless otherwise specified.
- This drawing was drawn on cad system.
- Refer to the "cad03919-3d134368-1-wiring-diagram-210406.ai" formatted file unless otherwise specified.

3D134368

8 Wiring diagrams

8 - 1 Wiring Diagrams - Three Phase

RXF50F
ARXF50F

Wiring diagram

For the power requirements, refer to the nameplate

A1P	Printed circuit board
C415	Capacitor
DB1	Diode bridge
IPM201, IPM801	Intelligent power module
L	Live
M1C	Compressor motor
M1F	Fan motor
N	Neutral
PAM	Pulse-amplitude modulation
PS	Switching power supply
Q1L	Overload protector
S1PH	High pressure switch
SA1	Surge arrestor
X1M	Terminal strip
Y1E	Electronic expansion valve coil
Y1S	Reversing solenoid valve coil
F4U, F31U, F401U	Fuse
MRM21, MRM22, MR31, MR601,	Magnetic relay
R1T, R2T, R3T	Thermistor
X10A, X21A, X30A, X40A, X50A, X70A, X80A, X90A	Connector
V1, V2, V551	Varistor
Z1C, Z2C, Z3C, Z4C	Ferrite core
S, MR31_A, MR31_B	Connection
Z1F	Noise filter

BLK : Black
 WHT : White
 BRN : Brown
 RED : Red
 GRN : Green
 YLW : Yellow
 ORG : Orange
 BLU : Blue
 GRY : Grey
 ⊕ : Protective earth
 ± : Earth

: Field wiring

4D147370B

9 Sound data

9 - 1 Sound Pressure Spectrum



9

RXF20F

ARXF20F

Cooling mode

Heating mode

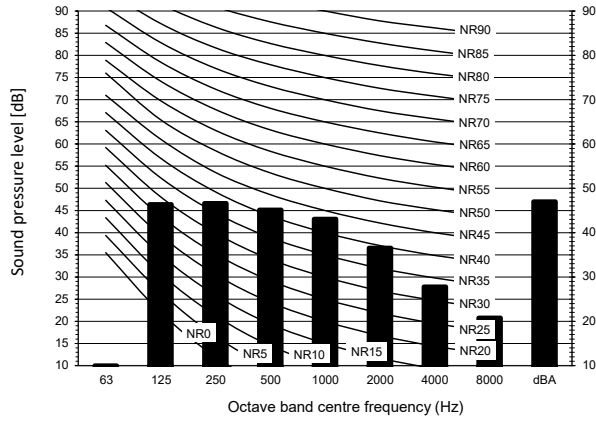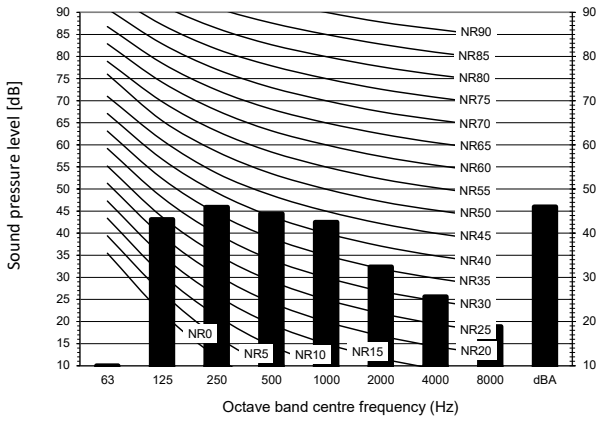


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B Fan speed: High

Cooling		Heating	
A	Total dB	A	Total dB
dBA	46	dBA	47

Location of microphone



Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber



4D131996

RXF25F

ARXF25F

Cooling mode

Heating mode

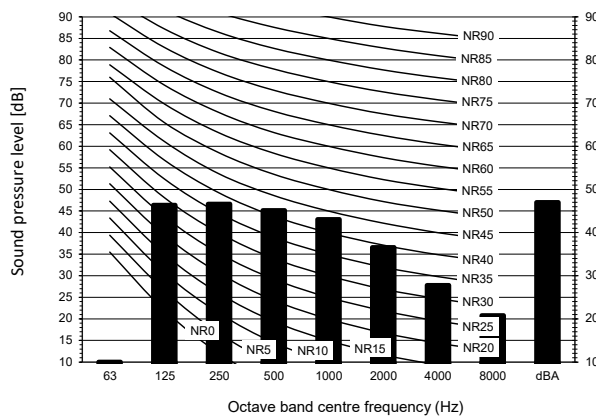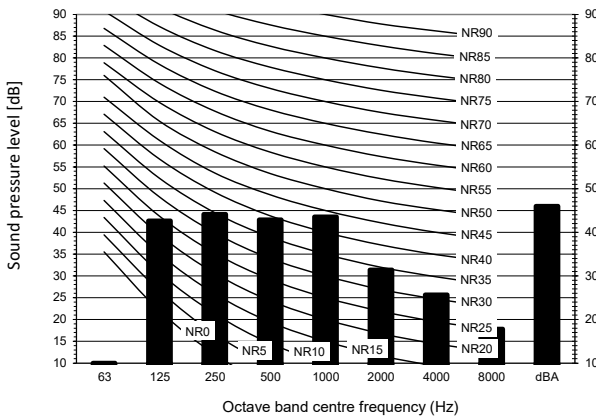


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B Fan speed: High

Cooling		Heating	
A	Total dB	A	Total dB
dBA	46	dBA	47

Location of microphone



Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

4D131997

9 Sound data



9 - 1 Sound Pressure Spectrum

RXF35F

ARXF35F

Cooling mode

Heating mode

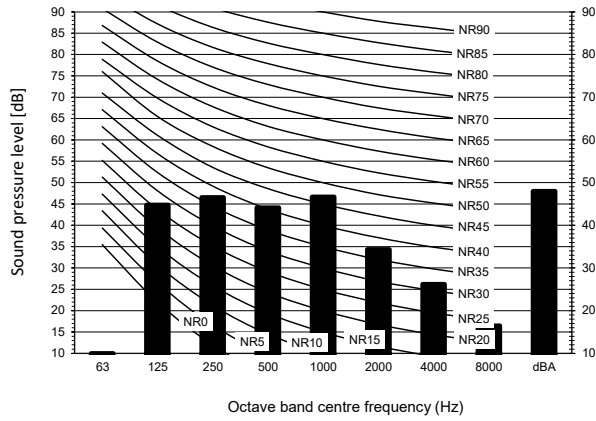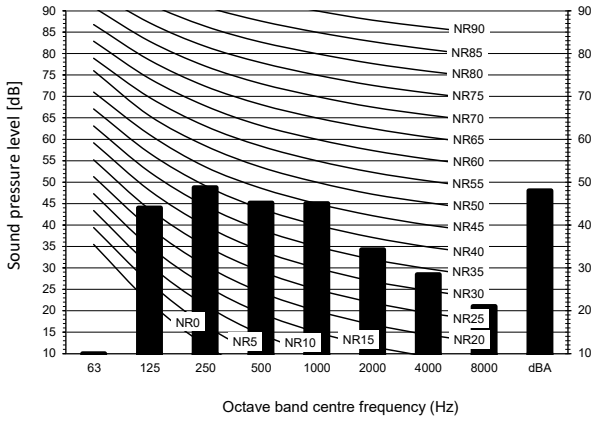


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B Fan speed: High

Location of microphone



Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

Cooling		Heating	
Total dB		Total dB	
A	B	A	B
dBA	48	dBA	48



4D131998

RXF42F

ARXF42F

Cooling mode

Heating mode

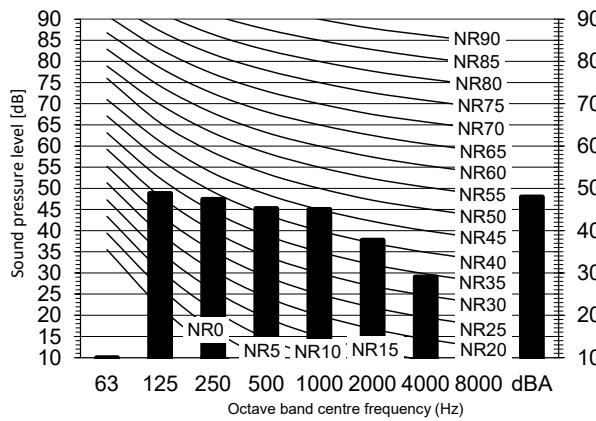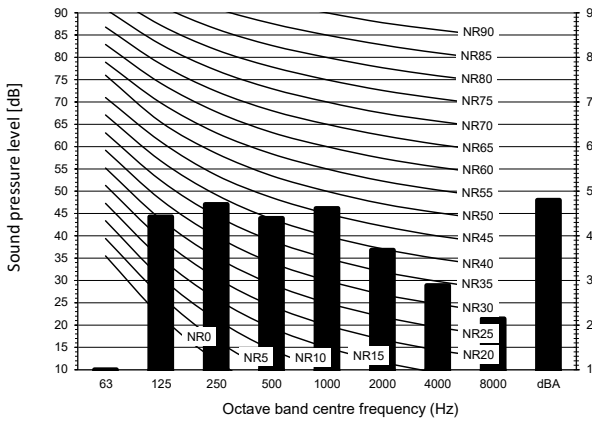


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B Fan speed: High

Location of microphone



Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

Cooling		Heating	
Total dB		Total dB	
A	B	A	B
dBA	48	dBA	48



4D131999

9 Sound data

9 - 1 Sound Pressure Spectrum

9

RXF50F ARXF50F

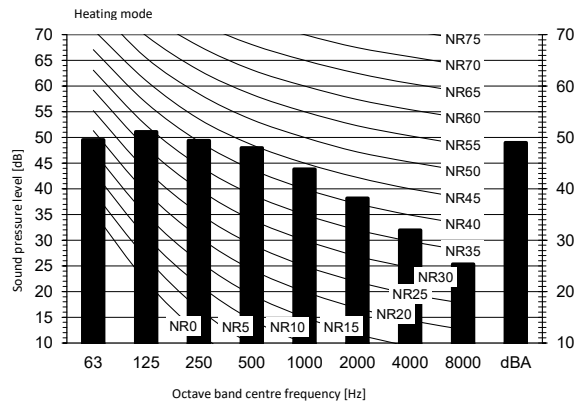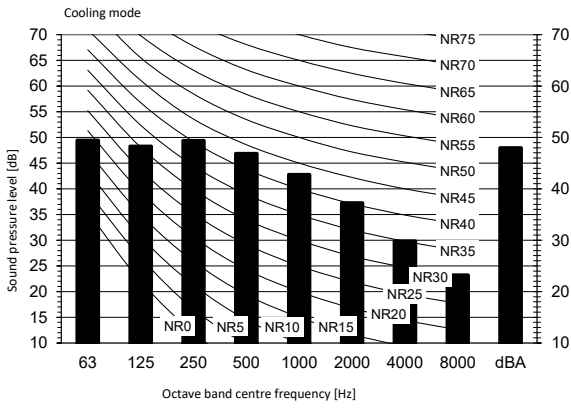

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B Fan speed: High

Cooling		Total dB
A	B	
dBA		48

Heating		Total dB
A	B	
dBA		49

Location of microphone



Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber


4D153717

10 Operation range


10 - 1 Operation Range

RXF-F
ARXF-F

Cooling

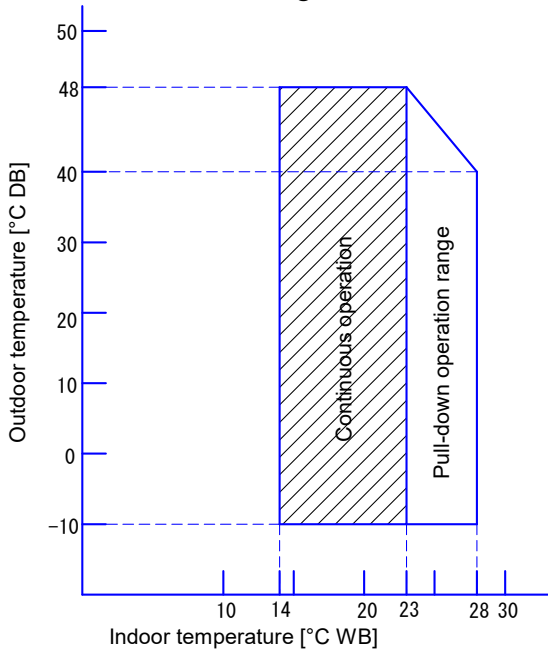

Heating

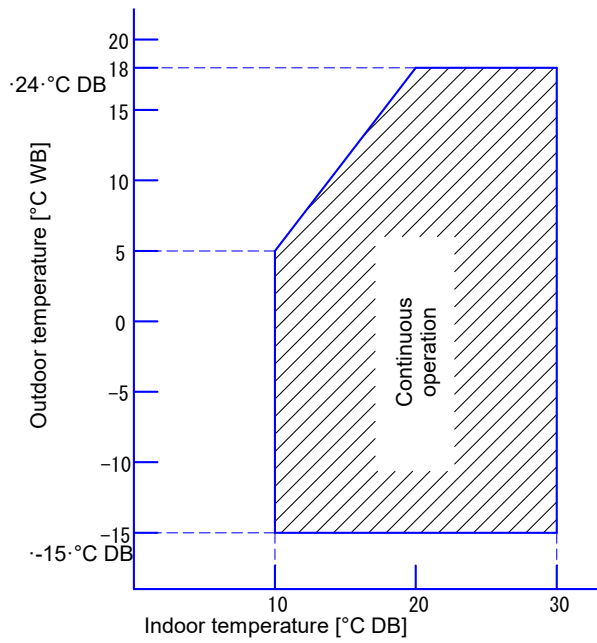

Notes

1. The graphs are based on the following conditions.

- Corresponding refrigerant piping length: 5 m
- Level difference: 0 m
- Air flow rate High

3D669693A

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



I N D U S T R I E S

Str. Izvoare, nr. 149, Piatra-Neamț, jud. Neamț
mail: office@grupaxa.ro
Tel.: +40726.233.522 / +40785.095.065

EEDEN25

01/2025



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.