

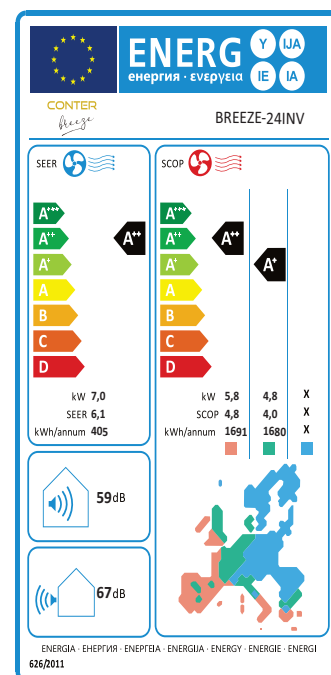
AER CONDITIONAT INVERTER

CONTER BREEZE









Specificatii tehnice **24000 BTU**

Model		CONTER BREEZE 24 INV	
Denumire model		MSAFDU-24HRFN8-QRD0GW	
Unitate Interioara		MSAFDU-24HRFNX-QRD0GW	
Unitate Exterioara		MOX431-24HFN8-QRD0GW	
Alimentare		Ph-V-Hz	220-240V,1Ph,50Hz
Racire nominala	Capacitate	Btu/h	24000 (7100~27000)
Putere racire intrare		W	2600 (420~3150)
Curent racire		A	11.5 (1.8~13.8)
Incalzire nominala	Capacitate	Btu/h	25000 (5500~27000)
Putere incalzire intrare		W	2400 (300~2750)
Curent incalzire		A	11 (1.3~12.2)
Racire sezoniera	Pdesignc	kW	7.0
	SEER	W/W	6.1
	Clasa eficienta energetica		A++
Incalzire(medie)	Pdesignh	kW	4.8
	SCOP	W/W	4.0
	Clasa eficienta energetica		A+
	Tbiv	°C	-7
Tol		°C	-15
Indepartare umiditate		L/h	/
Consum max intrare		W	3500
Curent max.		A	15.5
Curent pornire		A	0
Compresor	Model	KTM240D43UKT	
	Tip	Rotativ	
	Brand	GMCC	
	Capacitate	Btu/h	7600
	Intrare	W	2045
	Curent nominal (RLA)	A	9
	Amplificator rotor blocat (LRA)	A	/
	Protector termic		/
	Pozitie protector termic		/
	Condensator	uF	/
	Ulei Refrigerant/incarcare ulei	ml	VG74/620



Motor ventilator unitate interioara	Model		ZKFP-58-8-1-5
	lesire	W	58.0
	Condensator	uF	/
	Viteza (Hi/Mi/Lo)	r/min	1130 / 900 / 800
Serpentina unitate interioara	a. Numar de randuri		2.0
	b. Pas tub(a)x pas rand(b)	mm	21x13.37
	c. Distanța aripioare	mm	1.3
	d. Tip aripioare (cod)		Aluminiu hidrofiliic
	e. Diametru ext. tub si tip	mm	Φ7, canal interior tub
	f. Lungime x inaltime x latime serpentina	mm	780x210x26.74+780x105x26.74
	g. Numar circuite		4
Debit aer unitate interioara (Hi/Mi/Lo)		m ³ /h	980/817/662
Nivel zgomot unitate interioara (Hi/Mi/Lo/Si)		dB(A)	45/40.5/36
Nivel zgomot unitate interioara (Hi)		dB(A)	59
Unitate interioara	Dimensiuni(W*D*H)	mm	1040x220x327
	Ambalare (W*D*H)	mm	1120x405x315
	Masa neta/bruta	Kg	12.3/15.8
Motor ventilator unitate interioara	Model		ZKFN-80-8-3
	lesire	W	/
	Condensator	uF	/
	Viteza (Hi/Mi/Lo)	r/min	830/700/550
Serpentina unitate exterioara	a. Numar de randuri		1.6
	b. Pas tub(a)x pas rand(b)	mm	21x13.37
	c. Distanța aripioare	mm	1.3
	d. Tip aripioare (cod)		Aluminiu hidrofiliic
	e. Diametru ext. tub si tip	mm	Φ7, canal interior tub
	f. Lungime x inaltime x latime serpentina	mm	900*44*609
	g. Numar circuite		5
Debit aer unitate exterioara		m ³ /h	3500
Nivel zgomot unitate exterioara		dB(A)	59
Nivel max. zgomot unitate exterioara		dB(A)	67
Unitate exterioara	Dimensiuni(W*D*H)	mm	890x342x673
	Ambalare (W*D*H)	mm	995x398x740
	Masa Neta/bruta	Kg	42.9/45.9
Refrigerant	tip		R32
	GWP		/
	Cantitate incarcare	Kg	1.42
Presiune proiectata		MPa	4.3/1.7
Conducte refrigerant	Lateral lichid/ lateral gaz	mm (inch)	9.52mm (3/8in)/15.9mm (5/8in)
	Lungime max. conducta refrigerant	m	50
	Diferenta max. de nivel	m	25
Conexiuni cablaj			2.5x5//
Tip stecher			//fara
Tip termostat			Comanda de la distanta
Temperatura lucru	Unitate interioara(racire/ incalzire)	°C	17~32/0~30
	Unitate exterioara(racire/ incalzire)	°C	-15~50/-15~30
Domeniu aplicabil		m ²	32~47

Caracteristici principale

-  Racire si incalzire
-  Control prin WIFI
-  Functie Follow me
-  Auto curatare
-  Auto restart
-  Mod noapte (Sleep mode)

CONTER

Breeze